

AVP561



HD
1080P



Vari-focal
Lens



PoC



10X Optical
Zoom



External
I/O



Solid
Light



Mobile
Surveillance



ETS

APOLLO PRO

2MP Vari-focal IR Bullet IP Camera

FEATURES

- Worked with **PoC (Power-over-Coaxial) converter, AVX912R6**, to set up the whole HD IP system with coaxial cables, suitable for replacing your existing CCTV system to HD IP system effectively
- Zoom lens of **f6.0 ~ f60mm** with **10x optical zoom**, 16x digital zoom and auto focus, suitable for various monitoring environments
- **External alarm I/O device** connection



- **ONVIF** (**ONVIFS**) standard supported to simplify system integration
- **WDR** to increase image recognizability in overexposure and dark areas



- **Solid Light** series featuring better overexposure prevention (Advanced Smart Light Control), automatic adjustment of image brightness, and longer lifetime of LEDs



- **Remote Surveillance**
 - **Fully compatible** with **iOS** and **Android** devices, and **Internet Explorer** on Windows operating system
 - **Push Video** available on your iOS and Android devices when used with Push Video NVR series



● SPECIFICATIONS

■ Network	
Data Transmission Speed	10/100/1000 Based-T
Supported Protocols	DDNS, PPPoE, DHCP, NTP, SNTP, TCP/IP, ICMP, SMTP, FTP, HTTP, RTP, RTSP, RTCP, IPv4, Bonjour, UPnP, DNS, UDP, IGMP, QoS, SNMP
ONVIF Compatible	YES (Profile S)
Number of Online Users	10
Security	(1) Multiple user access levels with password (2) IP address filtering (3) Digest authentication
Remote Access	(1) Internet Explorer on Windows operating system (2) 16CH Video Viewer on Windows & MAC operating system (3) EagleEyes on iPhone, iPad & Android mobile devices
■ Video	
Network Compression	H.264 (Main Profile) / MJPEG
Video Resolution	1920 x 1080 / 1280 x 720 / 720 x 480 / 352 x 240
Frame Rate	30fps
Multiple Video Streaming	4 (H.264, MJPEG)
■ General	
Image Sensor	1/2.8" SONY CMOS image sensor
Min Illumination	0.1 Lux / F2.0 (wide)~F2.8(Tele), 0 Lux (LED ON)
Shutter Speed	1/10,000~1/7.5
S/N Ratio	More than 48dB (AGC off)
Lens	f6.0 ~ 60 mm, F2.0 ~ 2.8 10x Optical Zoom, auto focus, near focus limit 10 cm (wide) or 80cm (tele) to infinity
Viewing Angle	1X: 47.3° (Horizontal) x 27.5° (Vertical) x 53.5° (Diagonal) 10X: 5.3° (Horizontal) x 3.0° (Vertical) x 6.1° (Diagonal)
IR LED	3 Units
IR Effective Distance**	Default : up to 40 meters ; IR Enhanced Mode : up to 60 meters
IR Shift	YES
Smart Light Control	YES
White Balance	ATW
AGC	Auto
IRIS Mode	AES
WDR	YES
POC	YES
External Alarm I/O	YES (1 input / 1 output)
IP Rating	IP67
Operating Temperature	-20℃ ~ 50℃
Video Output	1.0 Vp-p composite, 75Ω
Power Source (±10%)	DC12V / 1.5A
Current Consumption (±10%)	950mA
Power Consumption (±10%)	15.5W Max (PoC) ; 12.54W (DC Adapter)




● SPECIFICATIONS (Continued)

■ Others	
Mobile Surveillance	iOS & Android mobile devices
Event Notification	FTP / Email / SMS
3-Axis	YES
Digital Pan / Tilt / Zoom	YES
Motion Detection	YES
RTC (real-time clock)	YES
Minimum Web Browsing Requirements	<ul style="list-style-type: none"> • Intel core i3 or higher, or equivalent AMD • 2GB RAM • AGP graphics card, Direct Draw, 32MB RAM • Windows 7, Vista & XP, DirectX 9.0 or later • Internet Explorer 7.x or later

*The specifications are subject to change without notice.

**Using IR enhanced mode and slow shutter speed, the distance can be extended even longer.

● DIMENSIONS

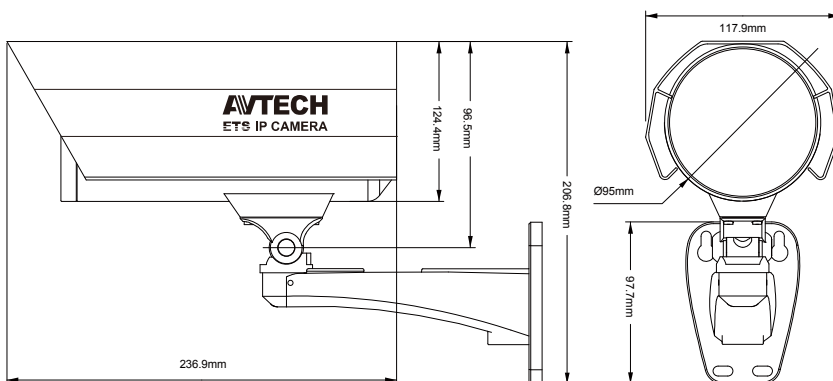

Dimensional tolerance: ± 5mm